

WELLBOOM

PRP® WELL BOOM

**FOR USE IN GROUNDWATER
MONITORING WELLS*
ABSORBS OIL ON CONTACT!**

UniRemInc's **WellBoom** is designed to facilitate testing in groundwater monitoring wells and is much less costly than traditional methods.

When installed, it submerges about 50% and adjusts to changing water levels. It remains bouyant until depleted.

Not only will the **WellBoom** absorb "free product" on contact, it won't allow "leaching". It then promotes the rapid bio-degradation of the absorbed, groundwater-contaminating hydrocarbons!


The **WellBoom's** most optimal performance will occur when the water temperature is in a range of 35 - 95 degrees Farenheit.

Simple to install, simple to maintain with no costly disposal of messy, smelly, oil-soaked material required when **WellBoom** is done. Simply throw the boom casing in the trash!

* For use in groundwater monitoring wells (accomodates pipe sizes 2" to 8" in diameter).



- ALL - NATURAL
- ORGANIC
- BIODEGRADABLE
- NON - TOXIC
- HYDROPHOBIC
- OLEOPHILIC
- Well Boom size 1½" - 3" diameter by 36" length
- Custom lengths and diameters available

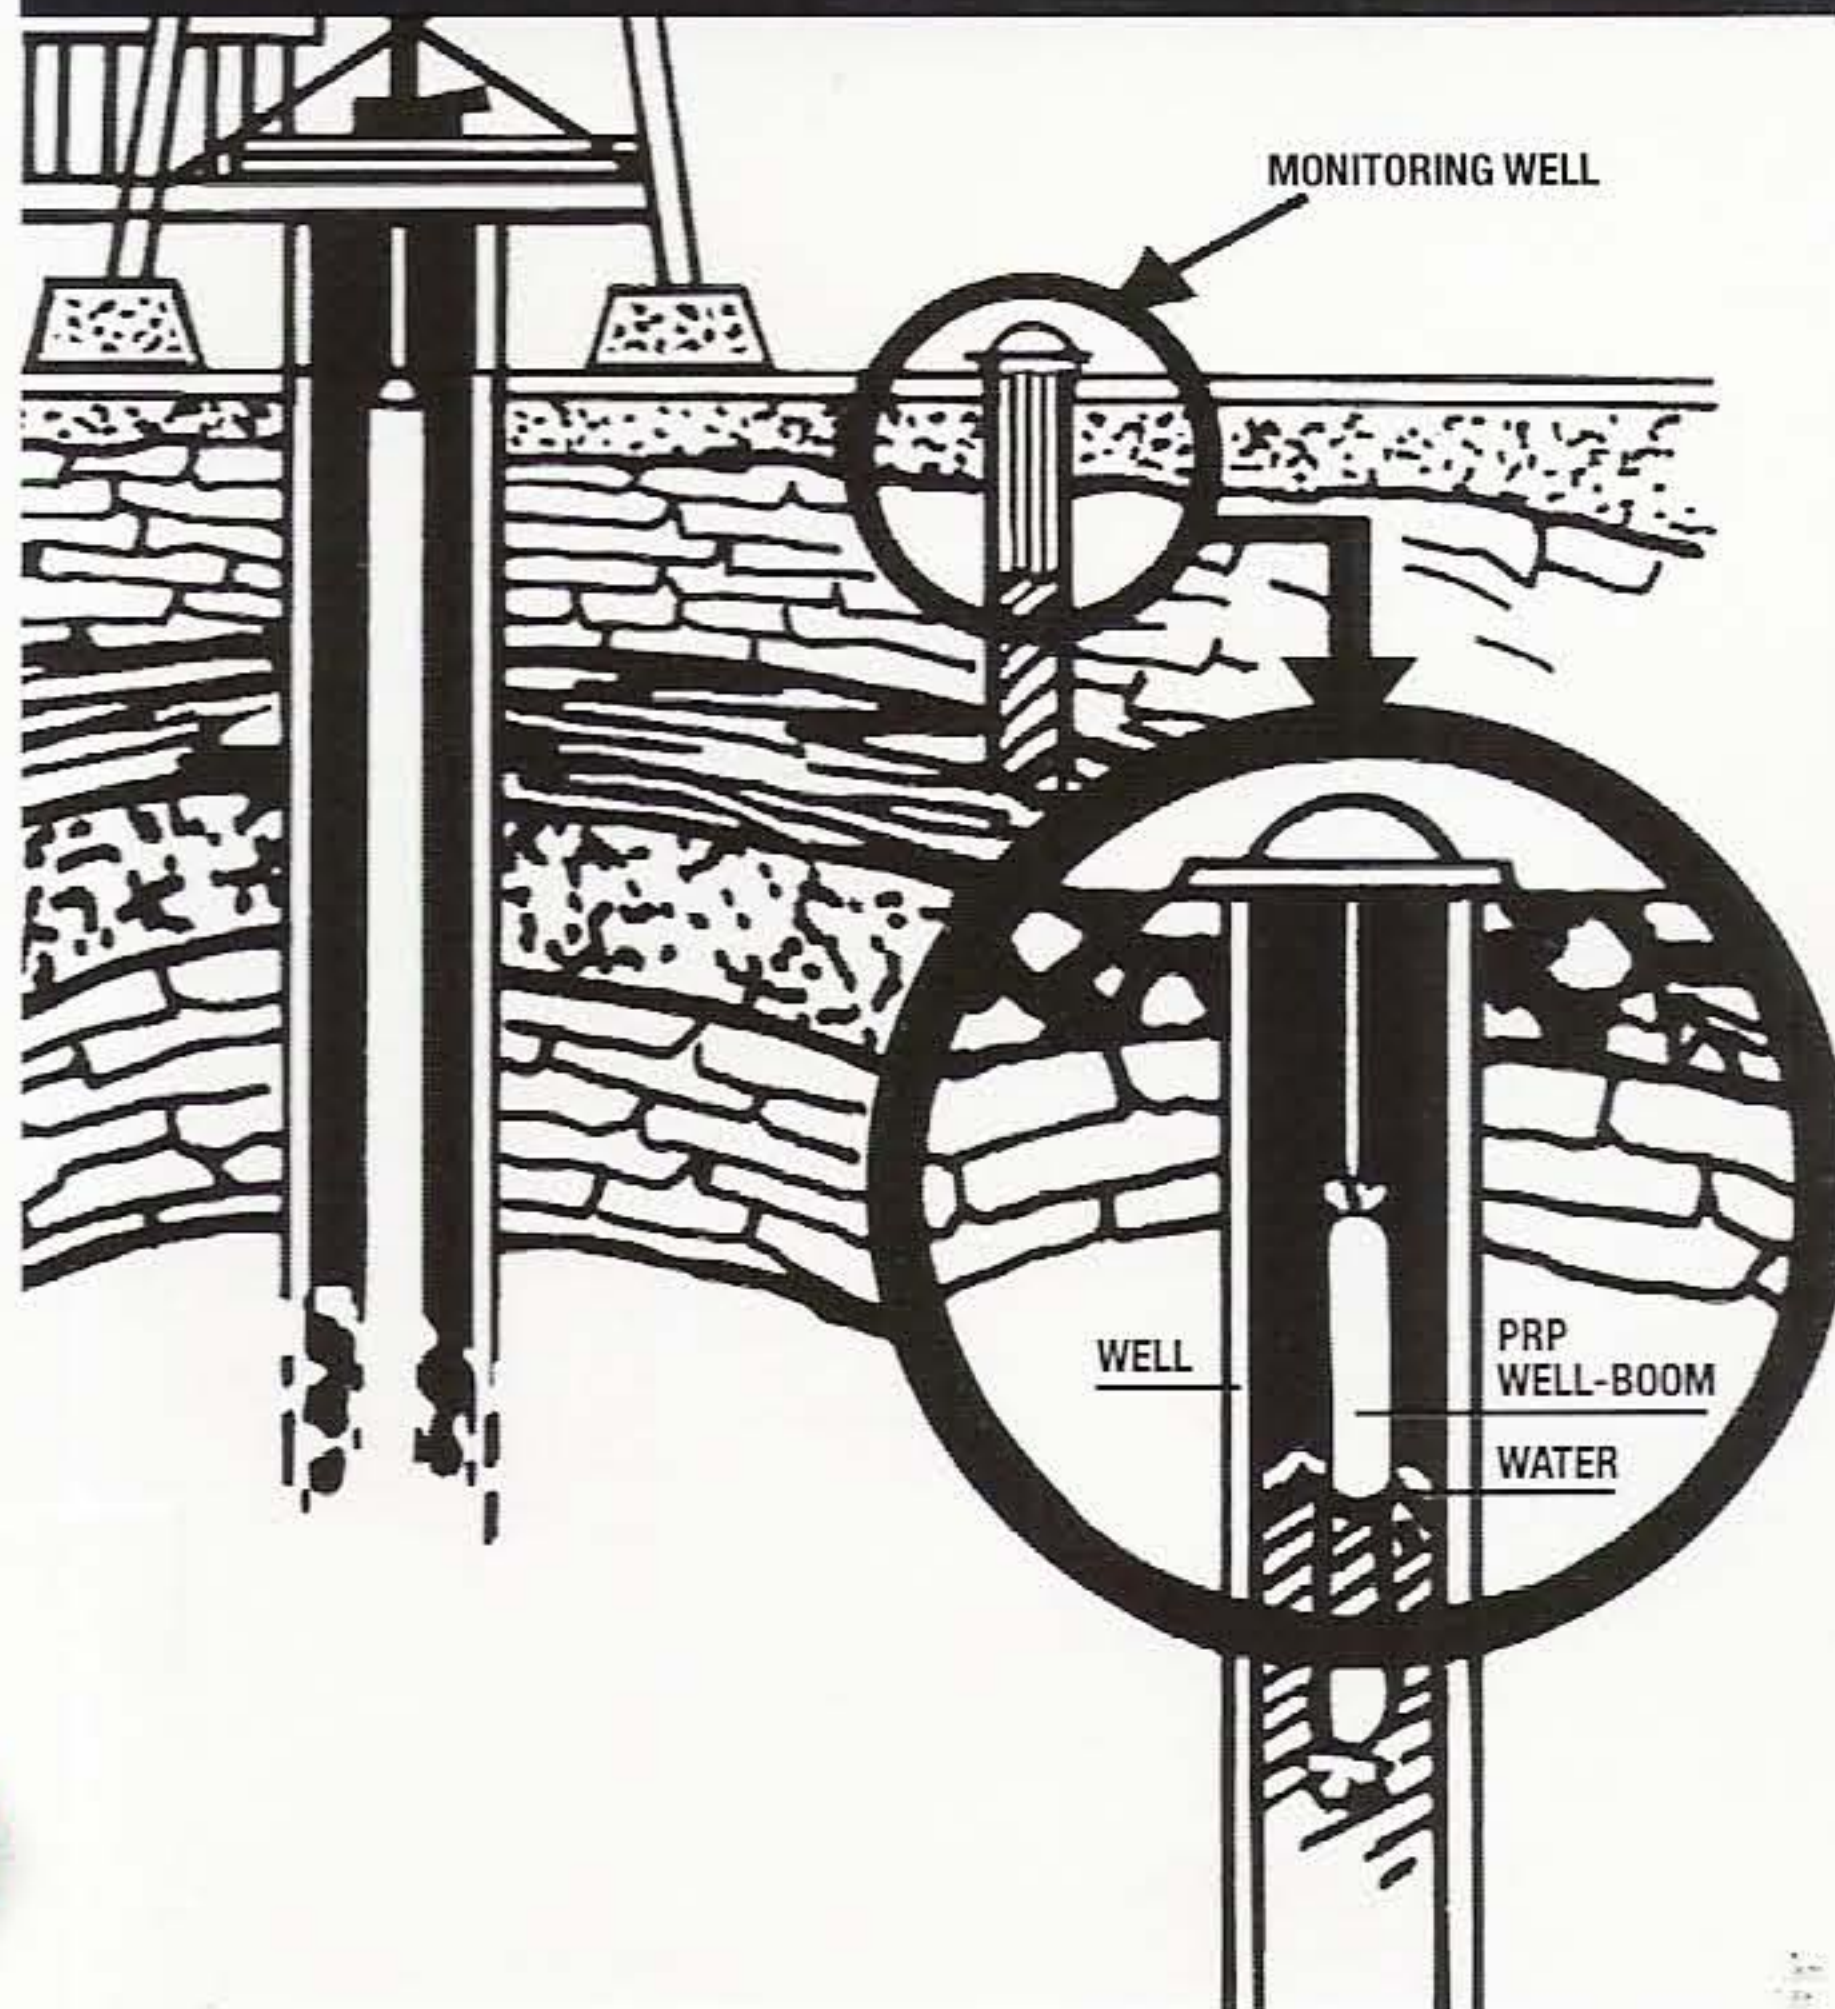

OilSpillRem 
Oil Spill Remediation

Authorized distributor of Universal Remediation PRP Products
Buy online at www.OilSpillRem.com or sales@OilSpillRem.com